

## 2.4GHz Panel II 14 dBi Antenna

### 14 dBi Panel II Antenna with 2.4GHz Frequency

This panel antenna delivers extended access point range in a single floor environment ideally positioned in the corner of a building. It functions from point-to-point so that you can wirelessly connect LANs between the buildings in a campus-type environment. It provides multiform transmission when placed on a ceiling, as the higher powder output extends the range through typical flooring materials





### Specification:


Technical Information	
Item No.	PA-2450-14
Frequency	2400-2483 MHz
Gain	14dBi
Polarization	Vertical
Beamwidth degree	Horz.20° Vert.20°
VSWR	≤ 1.5:1
Impedance	50 Ω
Dimensions	
Size	L239 x W239 x H30 mm
Weight	774.50 g
Connector	N - Type / Female

## VSWR

## Plane field Patterns

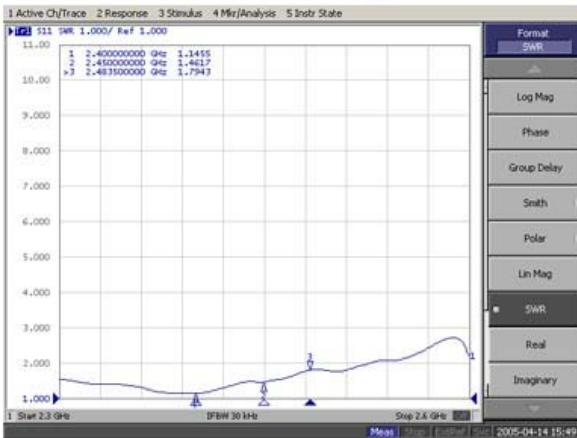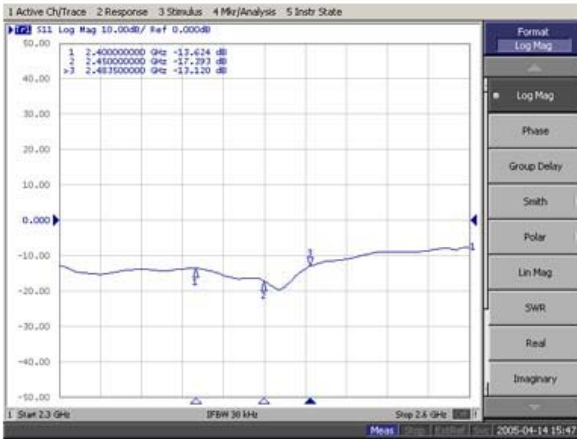

### H-PLANE FIELD PATTERNS

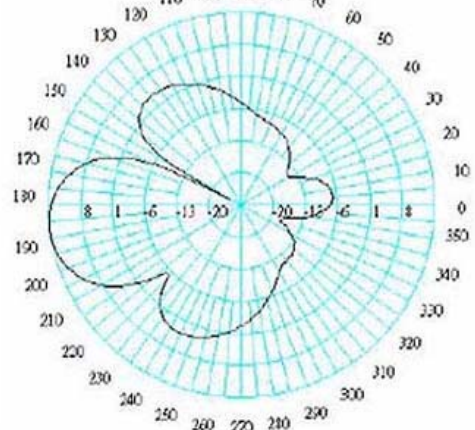

### E-PLANE FIELD PATTERNS

