

2.4GHz Panel II 18 dBi Antenna

18 dBi Panel II Antenna with 2.4GHz Frequency



This panel antenna delivers extended access point range in a single floor environment ideally positioned in the corner of a building. It functions from point-to-point so that you can wirelessly connect LANs between the buildings in a campus-type environment. It provides multiform transmission when placed on a ceiling, as the higher powder output extends the range through typical flooring materials



Specification:


| Technical Information | |
|-----------------------|----------------------|
| Item No. | PAII-2450-18 |
| Frequency | 2400-2483 MHz |
| Gain | 18dBi |
| Polarization | Vertical |
| Beamwidth degree | Horz.35° Vert.18° |
| VSWR | ≤ 1.5:1 |
| Impedance | 50 Ω |
| Dimensions | |
| Size | L290 x W290 x H35 mm |
| Weight | 1280g |
| Connector | N - Type / Female |

VSWR

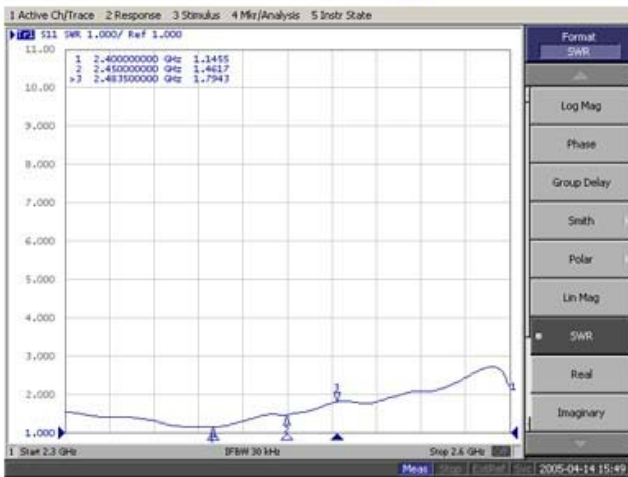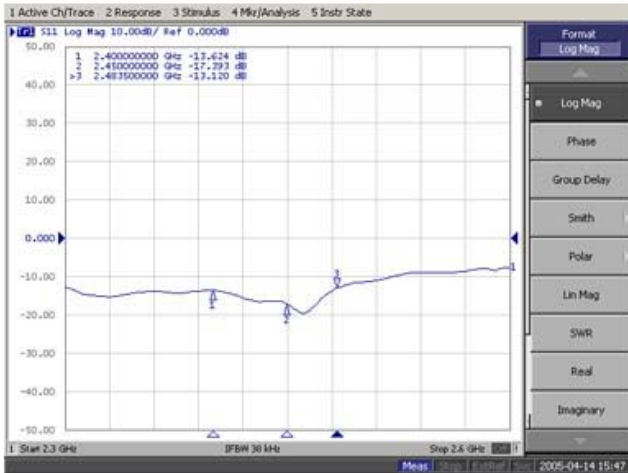

Plane field Patterns

H-PLANE FIELD PATTERNS

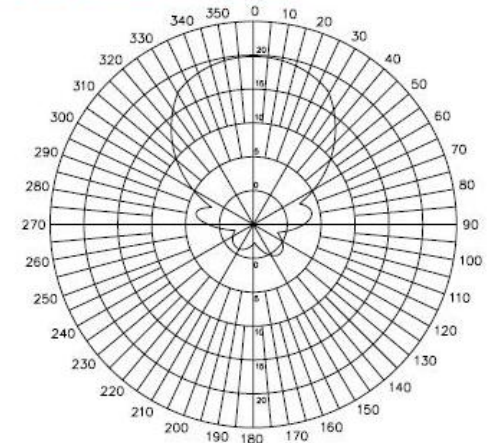

E-PLANE FIELD PATTERNS

