
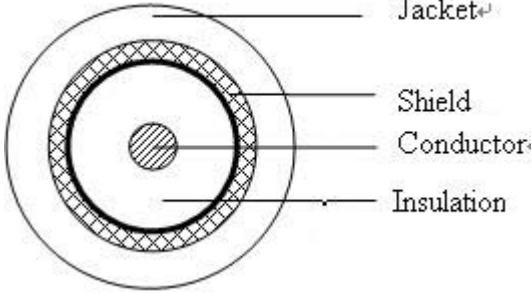


TECHNICAL SPECIFICATION						
CABLE TYPE		RG 213/U COAXIAL CABLE				
STRUCTURE						
Conductor	Composition(No./mm)	7/0.752mm				
	Material	Strand Bare Copper Wire				
	Outside Diameter (mm)	2.3mm				
Insulation	Material	Solid polyethylene				
	Thickness (mm)	2.45mm				
	Nom. Diameter(mm)	7.24±0.15mm				
Shield	Material	Bare Copper Wire				
	Construction	24*8/0.18mm				
	Diameter(mm)	0.18±0.008mm (95% coverage)				
Jacket	Material	PVC				
	Diameter(mm)	10.3 ±0.15mm				
	Color	Black				
Printing						
ELECTRICAL CHARACTERISTIC						
Impedance	Ω	50±3				
Insulation Resistance	MΩ / km	1000↑				
Capacitance	pF/M	98±3				
Attenuation	Frequency(MHz)	100	200	400	700	900
	dB/100M	6.2	8.9	13.4	21.4	25.0
 <p>RF Castle Electronics Co., Ltd.</p>						
		CHKD	C.H. Liu		4174U08009001M1	
		APPD	Vincent Shen		Date:APR.18,2005	