
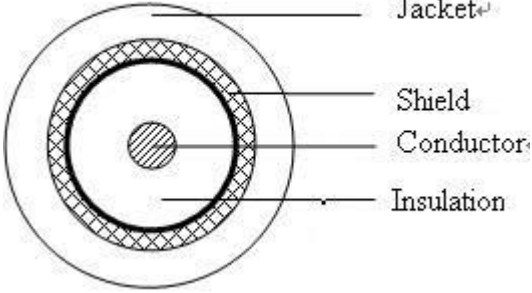


TECHNICAL SPECIFICATION		
CABLE TYPE	RG -8/U COAXIAL CABLE	
STRUCTURE		
Conductor	Composition(No./mm)	7/0.724mm
	Material	Annealed Strand Bare Copper Wire
	Outside Diameter (mm)	2.21mm
Insulation	Material	Solid polyethylene
	Thickness (mm)	2.50mm
	Nom. Diameter(mm)	7.24±0.15mm
Shield	Material	Bare Copper Wire
	Construction	24*8/0.16mm
	Diameter(mm)	0.16±0.008mm
Jacket	Material	PVC
	Diameter(mm)	10.3 ±0.15mm
	Color	Black
Printing		

ELECTRICAL CHARACTERISTIC						
Impedance	$\Omega$ 52±3					
Insulation Resistance	M $\Omega$ / km 1000↑					
Capacitance	pF/M 97±3					
Attenuation	Frequency(MHz)	50	100	200	400	900
	dB/100M	4.3	6.2	8.9	13.4	24.9

 <p>RF Castle Electronics Co., Ltd.</p>					
	DRWN	JACKY.SHEN		DRWN. No.:	
	CHKD	C.H. Liu			
	APPD	Vincent Shen		Date:MAR.13,2009	