

2.4GHz Panel II 20 dBi Antenna

20 dBi Panel II Antenna with 2.4GHz Frequency


This panel antenna delivers extended access point range in a single floor environment ideally positioned in the corner of a building. It functions from point-to-point so that you can wirelessly connect LANs between the buildings in a campus-type environment. It provides multiform transmission when placed on a ceiling, as the higher powder output extends the range through typical flooring materials



Specification:

Technical Information	
Item No.	PAII-2450-20
Frequency	2400-2500 MHz
Gain	20.5dBi
Polarization	Vertical
Beamwidth degree	Horz.15° Vert.16°
VSWR	≤ 1.5:1
Impedance	50 Ω
Dimensions	
Size	L351 x W396 x H34 mm
Weight	2300 g
Connector	N - Type / Female

VSWR

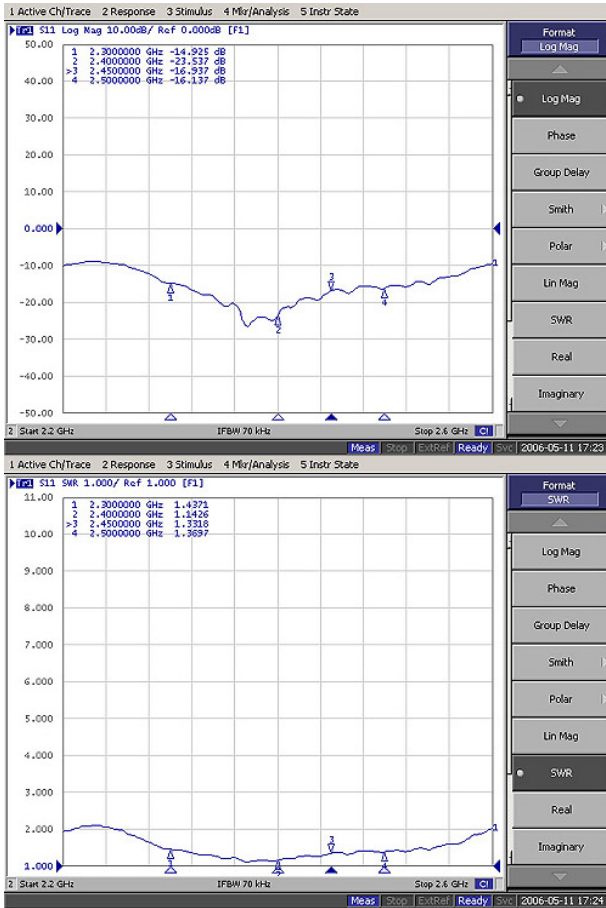

Plane field Patterns

